

BETA XL GRIZZLY

THE ULTIMATE OFFSET ALLROUNDER

Fast and powerful. For the professional with large overgrown areas and little time. Double-walled construction for extra resistance to damage from stones and sandblasting. Cold forged heavy hammers and hydraulically operated mulching doors allow for high production output. Highly suited for vigorous maintenance of sloping grounds and vertical vegetation by farmers, growers, contractors and municipalities.



Protected

Safety valve, flow control, tilt protection and gearbox protection

Robust

Italian Comer gearbox with 5 V belts and belt tensioner

Hard


Cold forged serrated hammers of 1,650 grams for shredding large branches

Mulch doors

Hydraulically operated switchover between mowing and mulching

Ultra tough


Double walled for extra wear resistance

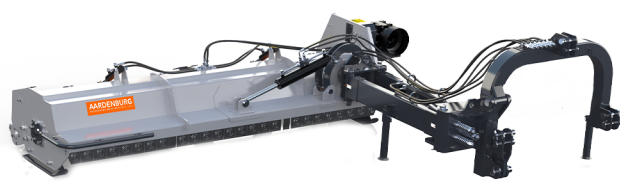

Specifications

Models	Weight kg	Working width mm	Power demand HP	Attachement	PTO RPM	Drive system	Tool pieces	Rotor diameter mm	Total diameter mm	Reach right mm	Reach left mm	Reach rearward mm	Reach inclined mm	Cutting power mm
XL 1800 Grizzly	885	1800	75	CAT II, III	540	5 V-belt	14	140	370	2850	376	1952	1600	80-90
XL 2000 Grizzly	915	2000	80	CAT II, III	540	5 V-belt	14	140	370	3050	376	1952	1800	80-90
XL 2200 Grizzly	945	2200	85	CAT II, III	540	5 V-belt	16	140	370	3250	376	1952	2000	80-90
XL 2400 Grizzly	975	2400	95	CAT II, III	540	5 V-belt	18	140	370	3450	376	1952	2200	80-90
XL 2600 Grizzly	1003	2600	105	CAT II, III	540	5 V-belt	20	140	370	3650	376	1952	2400	80-90

Spare parts / Options

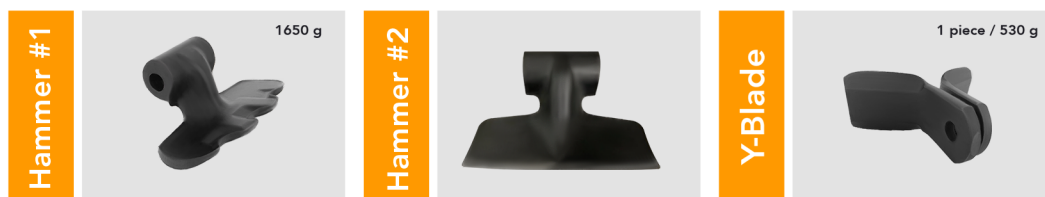

+31 6 40 74 20 13

sales@aardenburg1974.nl

www.aardenburg1974.nl

Valkseweg 46-01, 3771 RE Barneveld, Nederland

AARDENBURG1974.nl