

ALPHA XL FRONT

XL PERFORMANCE BEHIND AND IN FRONT OF THE TRACTOR

Highly productive and extremely tough. For professionals with the toughest and roughest jobs. Double-walled construction for extra resistance to damage from stones and sandblasting. 2-Sided drive and extended reach side shift on solid mounting frame for long-term use at maximum power. Ideally suited for use in stubble fields, dense high grass and uncultivated land by farmers and contractors.



Double

Sturdy double-sided CAT II frame for front and rear mounting

High speed

1000 RPM heavy duty gearbox for front and rear drive

Air cooled


Fan equipped pulley with XPB belts with automatic tensioner

Extra reach

2-sided oversized slide rails with 620 side shift

Ultra tough

Double walled for extra wear resistance

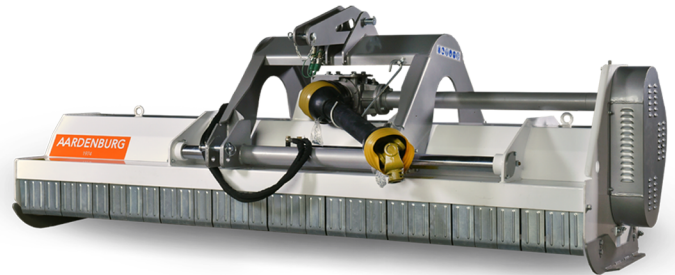

Specifications

Models	Weight kg	Working width mm	Power demand HP	Attachment	PTO RPM	Drive system	Tensioner	Tool pieces	Rotor diameter mm	Total diameter mm	Reach right mm	Reach left mm	Extended right mm	Extended left mm	Side shift mm	Cutting power mm
XL 2500	1054	2500	1000	CAT II, III	1000	5 V-belt	24	28	205	495	1250	1250	1880	620	600	600
XL 2800	1132	2800	1000	CAT II, III	1000	5 V-belt	26	32	205	495	1380	1420	2020	780	600	600
XL 3000	1180	3000	1000	CAT II, III	1000	5 V-belt	28	34	205	495	1480	1520	2120	880	600	600

Spare parts / Options



+31 6 40 74 20 13
 sales@aardenburg1974.nl
 www.aardenburg1974.nl
 Valkseweg 46-01, 3771 RE Barneveld, Nederland

AARDENBURG 1974.nl